

### Zener Diodes



#### FEATURES

- Silicon planar power Zener diodes
- For use in stabilizing and clipping circuits with high power rating
- Standard Zener voltage tolerance is  $\pm 5\%$
- These diodes are also available in the DO-41 case with type designation 1N4728A to 1N4764A
- AEC-Q101 qualified



**RoHS**  
COMPLIANT  
HALOGEN  
**FREE**

| PRIMARY CHARACTERISTICS      |                     |      |
|------------------------------|---------------------|------|
| PARAMETER                    | VALUE               | UNIT |
| V <sub>Z</sub> range nom.    | 3.3 to 100          | V    |
| Test current I <sub>ZT</sub> | 2.5 to 76           | mA   |
| V <sub>Z</sub> specification | Thermal equilibrium |      |
| Int. construction            | Single              |      |

| ORDERING INFORMATION |                                |                                |                        |
|----------------------|--------------------------------|--------------------------------|------------------------|
| DEVICE NAME          | ORDERING CODE                  | TAPED UNITS PER REEL           | MINIMUM ORDER QUANTITY |
| ZM4728A to ZM4764A   | ZM4728A to ZM4764A-series-GS18 | 5 000 (12 mm tape on 13" reel) | 10 000/box             |
| ZM4728A to ZM4764A   | ZM4728A to ZM4764A-series-GS08 | 1 500 (12 mm tape on 7" reel)  | 12 000/box             |

| PACKAGE               |        |                                      |                                   |                          |
|-----------------------|--------|--------------------------------------|-----------------------------------|--------------------------|
| PACKAGE NAME          | WEIGHT | MOLDING COMPOUND FLAMMABILITY RATING | MOISTURE SENSITIVITY LEVEL        | SOLDERING CONDITIONS     |
| MELF DO-213AB (glass) | 135 mg | UL 94 V-0                            | MSL level 1 (according J-STD-020) | 260 °C/10 s at terminals |

| ABSOLUTE MAXIMUM RATINGS (T <sub>amb</sub> = 25 °C, unless otherwise specified) |  |                   |               |      |
|---|--|-------------------|---------------|------|
| PARAMETER   | TEST CONDITION   | SYMBOL            | VALUE         | UNIT |
| Power dissipation   | Valid provided that electrodes are kept at ambient temperature | P <sub>tot</sub>  | 1000          | mW   |
| Zener current   | See table "Characteristics"                                    |                   |               |      |
| Junction to ambient air   | Valid provided that electrodes are kept at ambient temperature | R <sub>thJA</sub> | 170           | K/W  |
| Junction temperature  |  | T <sub>j</sub>    | 175           | °C   |
| Storage temperature range   |  | T <sub>stg</sub>  | - 65 to + 175 | °C   |

| <b>ELECTRICAL CHARACTERISTICS</b> ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified) |                                    |              |           |                         |      |  |                       |                              |                                  |
|--|------------------------------------|--------------|-----------|-------------------------|------|--|-----------------------|------------------------------|----------------------------------|
| PART NUMBER  | ZENER VOLTAGE RANGE <sup>(3)</sup> | TEST CURRENT |           | REVERSE LEAKAGE CURRENT |      | DYNAMIC RESISTANCE <sup>(1)</sup><br>f = 1 kHz |                       | SURGE CURRENT <sup>(4)</sup> | REGULATOR CURRENT <sup>(2)</sup> |
|  | $V_Z$ at $I_{ZT1}$                 | $I_{ZT1}$    | $I_{ZT2}$ | $I_R$ at $V_R$          |      | $Z_z$ at $I_{ZT1}$                             | $Z_{ZK}$ at $I_{ZT2}$ | $I_{ZSM}$                    | $I_{ZM}$                         |
|  | V                                  | mA           |           | $\mu\text{A}$           | V    | $\Omega$                                       |                       | mA                           | mA                               |
|  | NOM.                               |              |           | MAX.                    |      | MAX.   | MAX.                  |                              | MAX.                             |
| ZM4728A  | 3.3                                | 76           | 1         | 100                     | 1    | 10   | 400                   | 1380                         | 276                              |
| ZM4729A  | 3.6                                | 69           | 1         | 100                     | 1    | 10   | 400                   | 1260                         | 252                              |
| ZM4730A  | 3.9                                | 64           | 1         | 50                      | 1    | 9  | 400                   | 1190                         | 234                              |
| ZM4731A  | 4.3                                | 58           | 1         | 10                      | 1    | 9  | 400                   | 1070                         | 217                              |
| ZM4732A  | 4.7                                | 53           | 1         | 10                      | 1    | 8  | 500                   | 970                          | 193                              |
| ZM4733A  | 5.1                                | 49           | 1         | 10                      | 1    | 7  | 550                   | 890                          | 178                              |
| ZM4734A  | 5.6                                | 45           | 1         | 10                      | 2    | 5  | 600                   | 810                          | 162                              |
| ZM4735A  | 6.2                                | 41           | 1         | 10                      | 3    | 2  | 700                   | 730                          | 146                              |
| ZM4736A  | 6.8                                | 37           | 1         | 10                      | 4    | 3.5  | 700                   | 660                          | 133                              |
| ZM4737A  | 7.5                                | 34           | 0.5       | 10                      | 5    | 4  | 700                   | 605                          | 121                              |
| ZM4738A  | 8.2                                | 31           | 0.5       | 10                      | 6    | 4.5  | 700                   | 550                          | 110                              |
| ZM4739A  | 9.1                                | 28           | 0.5       | 10                      | 7    | 5  | 700                   | 500                          | 100                              |
| ZM4740A  | 10                                 | 25           | 0.25      | 10                      | 7.6  | 7  | 700                   | 454                          | 91                               |
| ZM4741A  | 11                                 | 23           | 0.25      | 5                       | 8.4  | 8  | 700                   | 414                          | 83                               |
| ZM4742A  | 12                                 | 21           | 0.25      | 5                       | 9.1  | 9  | 700                   | 380                          | 76                               |
| ZM4743A  | 13                                 | 19           | 0.25      | 5                       | 9.9  | 10   | 700                   | 344                          | 69                               |
| ZM4744A  | 15                                 | 17           | 0.25      | 5                       | 11.4 | 14   | 700                   | 304                          | 61                               |
| ZM4745A  | 16                                 | 15.5         | 0.25      | 5                       | 12.2 | 16   | 700                   | 285                          | 57                               |
| ZM4746A  | 18                                 | 14           | 0.25      | 5                       | 13.7 | 20   | 750                   | 250                          | 50                               |
| ZM4747A  | 20                                 | 12.5         | 0.25      | 5                       | 15.2 | 22   | 750                   | 225                          | 45                               |
| ZM4748A  | 22                                 | 11.5         | 0.25      | 5                       | 16.7 | 23   | 750                   | 205                          | 41                               |
| ZM4749A  | 24                                 | 10.5         | 0.25      | 5                       | 18.2 | 25   | 750                   | 190                          | 38                               |
| ZM4750A  | 27                                 | 9.5          | 0.25      | 5                       | 20.6 | 35   | 750                   | 170                          | 34                               |
| ZM4751A  | 30                                 | 8.5          | 0.25      | 5                       | 22.8 | 40   | 1000                  | 150                          | 30                               |
| ZM4752A  | 33                                 | 7.5          | 0.25      | 5                       | 25.1 | 45   | 1000                  | 135                          | 27                               |
| ZM4753A  | 36                                 | 7            | 0.25      | 5                       | 27.4 | 50   | 1000                  | 125                          | 25                               |
| ZM4754A  | 39                                 | 6.5          | 0.25      | 5                       | 29.7 | 60   | 1000                  | 115                          | 23                               |
| ZM4755A  | 43                                 | 6            | 0.25      | 5                       | 32.7 | 70   | 1500                  | 110                          | 22                               |
| ZM4756A  | 47                                 | 5.5          | 0.25      | 5                       | 35.8 | 80   | 1500                  | 95                           | 19                               |
| ZM4757A  | 51                                 | 5            | 0.25      | 5                       | 38.8 | 95   | 1500                  | 90                           | 18                               |
| ZM4758A  | 56                                 | 4.5          | 0.25      | 5                       | 42.6 | 110  | 2000                  | 80                           | 16                               |
| ZM4759A  | 62                                 | 4            | 0.25      | 5                       | 47.1 | 125  | 2000                  | 70                           | 14                               |
| ZM4760A  | 68                                 | 3.7          | 0.25      | 5                       | 51.7 | 150  | 2000                  | 65                           | 13                               |
| ZM4761A  | 75                                 | 3.3          | 0.25      | 5                       | 56   | 175  | 2000                  | 60                           | 12                               |
| ZM4762A  | 82                                 | 3            | 0.25      | 5                       | 62.2 | 200  | 3000                  | 55                           | 11                               |
| ZM4763A  | 91                                 | 2.8          | 0.25      | 5                       | 69.2 | 250  | 3000                  | 50                           | 10                               |
| ZM4764A  | 100                                | 2.5          | 0.25      | 5                       | 76   | 350  | 3000                  | 45                           | 9                                |

**Notes**

- (1) The Zener impedance is derived from the 1 kHz AC voltage which results when an AC current having an RMS value equal to 10 % of the zener current ( $I_{ZT1}$  or  $I_{ZT2}$ ) is superimposed on  $I_{ZT1}$  or  $I_{ZT2}$ . Zener impedance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units
- (2) Valid provided that electrodes are kept at ambient temperature
- (3) Measured under thermal equilibrium and DC test conditions
- (4) Width of the test pulse is 8.3 ms

### BASIC CHARACTERISTICS ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified)


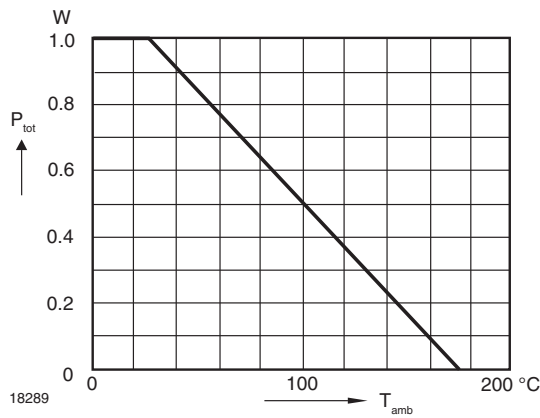


Fig. 1 - Admissible Power Dissipation vs. Ambient Temperature

### PACKAGE DIMENSIONS in millimeters (inches): MELF DO-213AB (glass)

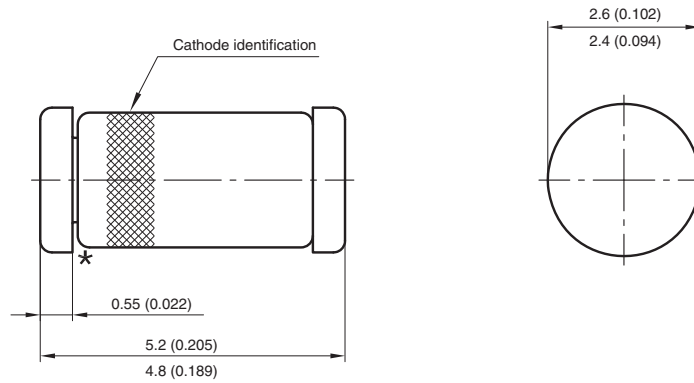

★ The gap between plug and glass can be either on cathode or anode side

Foot print recommendation:

