


Professional Thin Film Leaded Resistors



FEATURES

- Technology: metal film
- Professional resistors in small outlines
- Low noise

APPLICATIONS

- All general purpose applications

DESCRIPTION

A homogeneous film of metal alloy is deposited on a high grade ceramic body. After a helical groove has been cut in the resistive layer, tinned connecting wires of electrolytic copper are welded to the end-caps. The resistors are coated with lacquer which provides electrical, mechanical, and climatic protection. Four or five color code rings designate the resistance value and tolerance according to **IEC 60062**. Suitable replacements for MRS16 and MRS25 are MBA/SMA 0204 and MBB/SMA 0207 professional.

TECHNICAL SPECIFICATIONS		
DESCRIPTION	MRS16	MRS25
DIN size	0204	0207
CECC size	A	B
Resistance range	4.99 Ω to 1 MΩ	1 Ω to 10 MΩ
Resistance tolerance	± 1 %	
Temperature coefficient	± 50 ppm/K	
Rated dissipation, P_{70}	0.4 W	0.6 W
Operating voltage, U_{max} . AC/DC	200 V	350 V
Operating temperature range	-55 °C to 155 °C	
Peak permissible film temperature	155 °C	
Insulation voltage:		
1 min; U_{ins}	300 V	500 V
continuous	75 V	75 V

APPLICATION INFORMATION

The power dissipation on the resistor generates a temperature rise against the local ambient, depending on the heat flow support of the printed-circuit board (thermal resistance). The rated dissipation applies only if the permitted film temperature is not exceeded. Furthermore, a high level of ambient temperature or of power dissipation may raise the temperature of the solder joint, hence special solder alloys or board materials may be required to maintain the reliability of the assembly.

These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional lifetime. The designer may estimate the performance of the particular resistor application or set certain load and temperature limits in order to maintain a desired stability.

MAXIMUM RESISTANCE CHANGE AT RATED DISSIPATION			
Operation mode		Power	
Climatic category		-55 °C / +155 °C / 56 days	
Rated dissipation, P_{70}	MRS16	0.4 W	
	MRS25	0.6 W	
Applied maximum film temperature, $\vartheta_{F \max.}$		155 °C	
Max. resistance change at rated dissipation [$\Delta R/R \max.$], after:	MRS16	4.99 Ω to 1 M Ω	
	1000 h	$\pm (0.5 \% R + 0.05 \Omega)$	
	MRS25	1 Ω to 10 M Ω	
	1000 h	$\pm (0.5 \% R + 0.05 \Omega)$	


PART NUMBER AND PRODUCT DESCRIPTION																	
PART NUMBER: MRS1600C5119FCT00																	
M	R	S	1	6	0	0	0	C	5	1	1	9	F	C	T	0	0
TYPE		VARIANT		TCR		RESISTANCE			TOLERANCE		PACKAGING ⁽¹⁾		SPECIAL				
MRS1600 MRS2500		0 = neutral		C = ± 50 ppm/K		3 digit value 1 digit multiplier MULTIPLIER 7 = $\cdot 10^{-3}$ 2 = $\cdot 10^2$ 8 = $\cdot 10^{-2}$ 3 = $\cdot 10^3$ 9 = $\cdot 10^{-1}$ 4 = $\cdot 10^4$ 0 = $\cdot 10^0$ 5 = $\cdot 10^5$ 1 = $\cdot 10^1$ 6 = $\cdot 10^6$			F = $\pm 1 \%$		RP CT C1		Up to 2 digits 00 = standard				
PRODUCT DESCRIPTION: MRS16 50 1 % CT 51R1																	
MRS16		50		1 %		CT		51R1									
TYPE		TCR		TOLERANCE		PACKAGING ⁽¹⁾		RESISTANCE VALUE									
MRS16 MRS25		± 50 ppm/K		$\pm 1 \%$		RP CT C1		51R1 = 51.1 Ω 1K = 1 k Ω									

Notes

- The PART NUMBER is shown to facilitate the introduction of a unified part numbering system for ordering products
- ⁽¹⁾ Please refer packaging table

PACKAGING						
TYPE	CODE	QUANTITY	PACKAGING STYLE	WIDTH	PITCH	DIMENSIONS
MRS16 MRS25	C1	1000	Taped acc. to IEC 60286-1 fan-folded in a box	53 mm	5 mm	184 mm x 75 mm x 42 mm
	CT	5000				330 mm x 75 mm x 55 mm
	RP	5000	Taped acc. to IEC 60286-1 on a reel			242 mm x 76 mm x 86 mm

DIMENSIONS

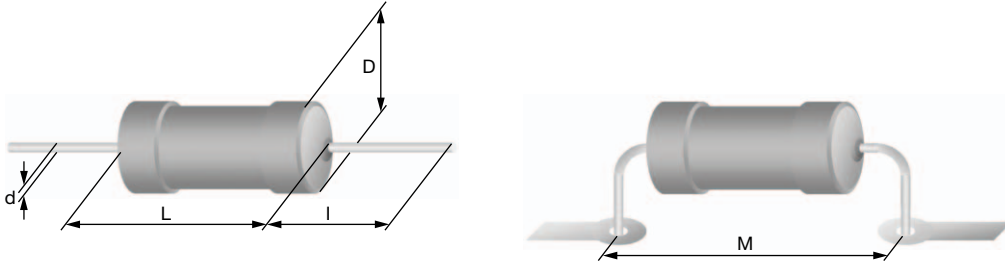

DIMENSIONS (Leaded Resistor Types, Mass and Relevant Physical Dimensions)						
TYPE	D _{max.} (mm)	L _{max.} (mm)	d _{nom.} (mm)	I _{min.} (mm)	M _{min.} (mm)	MASS (mg)
MRS16	1.6	3.6	0.5	29.0	5.0	125
MRS25	2.5	6.5	0.6	28.0	10.0	220

12NC INFORMATION FOR HISTORICAL CODING REFERENCE

- The resistors have a 12 digit numeric code starting with 2322 15.
- The subsequent 2 digits indicate the resistor type and packaging; see the 12NC Ordering Code table.
- The remaining 4 digits indicate the resistance value:
 - The first 3 digits indicate the resistance value.
 - The last digit indicates the resistance decade in accordance with the 12NC Indicating Resistance Decade table.

Last Digit of 12NC Indicating Resistance Decade

RESISTANCE DECADE	LAST DIGIT
1 Ω to 9.76 Ω	8
10 Ω to 97.6 Ω	9
100 Ω to 976 Ω	1
1 kΩ to 9.76 kΩ	2
10 kΩ to 97.6 kΩ	3
100 kΩ to 976 kΩ	4
1 MΩ to 9.76 MΩ	5
10 MΩ	6

12NC Example

The 12NC of a MRS16 resistor with value 750 Ω, supplied on a bandolier of 1000 units in ammpack is: 2322 157 17501.

12NC (Resistors Type and Packaging)			
TYPE	2322 15.		
	BANDOLIER IN AMMOPACK		BANDOLIER ON REEL
	1000 UNITS	5000 UNITS	5000 UNITS
MRS16	7 1....	7 2....	7 3....
MRS25	6 1....	6 2....	6 3....